

As defined by EN 17645. Go to report pages to see the complete detail by item.

Super Pump® Pro

PROVEN RELIABILITY, ESPECIALLY IMAGINED FOR PROFESSIONALS

- **Heavy duty, high performance** new motor, even more reliable and durable
- Extended-life Viton® and pure graphite pump seal for improved **resistance against chemicals and accidental dry running**
- **Easy maintenance:** exclusive swing-away hand knobs - no tools required
- Direct replacement of former Super Pump® without any installation modification




Union kit included




See-through strainer cover



Threaded adaptor

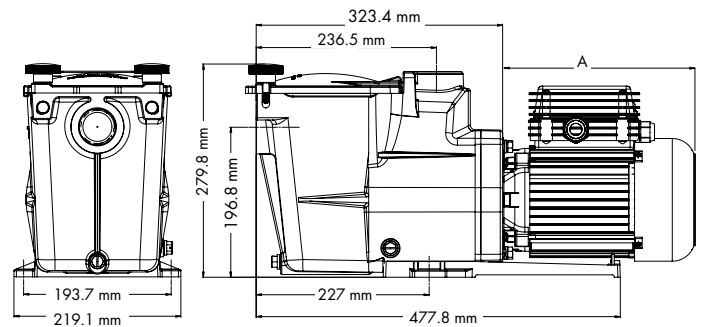

Pressure (mbar)

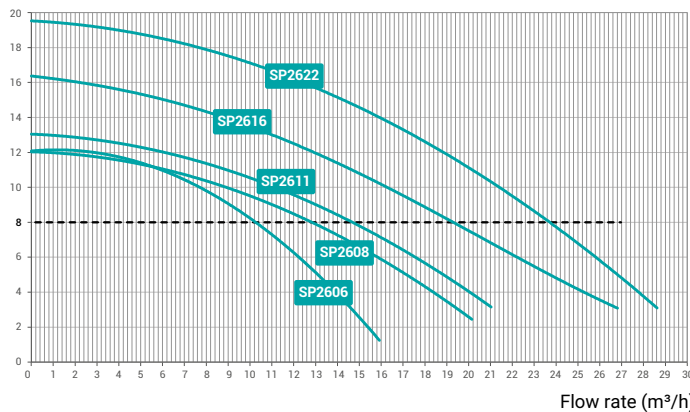

Technical Specifications

Max. water temp.	35°C
Adapter	2" / 50 mm (1/2-1HP) - 2" 63 mm (1.5-2HP)
Mechanical seal	AISI 304 Viton®, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IPX5, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC
Prefilter size	1.75 L

	Type HP	Dim. A (mm)	Weight (kg)	Flow rate*	I/O	Fittings ø (mm)	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Quantity per pallet	Item
SINGLE PHASE SUPER PUMP® PRO	1/2	205	15	10.3 m³/h	2" and 1.5"	2" : 50	650	650	2.95	24	SP2606HY81E2
	3/4	205	15	12.9 m³/h	2" and 1.5"	2" : 50	775	650	3.5	24	SP2608HY11E2
	1	205	15	14.3 m³/h	2" and 1.5"	2" : 50	790	650	3.75	24	SP2611HY161E2
	1.5	226	15.5	19.3 m³/h	2"	2" : 63	1070	790	4.8	24	SP2616HY221E2
	2	252	19	23.7 m³/h	2"	2" : 63	1540	1200	7.1	20	SP2622HY251E2
THREE PHASE SUPER PUMP® PRO	1	252	15.5	13.5 m³/h	2" and 1.5"	2" : 50	910	600	2.6/1.5	20	SP2611HY163
	1.5	252	15.5	18 m³/h	2"	2" : 63	1060	750	2.85/1.65	20	SP2616HY223
	2	252	17.5	22.4 m³/h	2"	2" : 63	1310	1100	4.0/2.3	20	SP2622HY253

* At 8 m water column.